

Company: \_\_\_\_\_  
 Contact Name: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 City, State, Zip: \_\_\_\_\_  
 Phone #: \_\_\_\_\_  
 Fax #: \_\_\_\_\_  
 Email: \_\_\_\_\_

Fax completed form  
to: 317-879-2454

Request for:  Quote  Order



**element**  
DESIGNS

**COURTER**

HELPING YOU OPEN DOORS

**Profile Type:**  
 EL001 (Natural Aluminum Finish)  EL001S (Stainless Steel Finish)  
 EL002 (Natural Aluminum Finish)  EL002S (Stainless Steel Finish)

Date: \_\_\_\_\_  
 PO Number (if applies): \_\_\_\_\_

**Insert Type: (6mm or 1/4")**  
 Glass - Tempered (etching options below)  
Glass may contain minor imperfections which are inherent to the mfg process.  
 Acrylic - Abrasion resistant coating on both sides  
Acrylic is abrasion resistant but not scratch proof.

**LED Color (Temperature):**  
 Warm - Ambient Light (3500K)  
 Daylight - Natural Light (6500K)

**Etching Options: (Glass Inserts Only)**  
 1/4" etched lines @ 1/4" spacing  
 1/16" etched lines @ 1/4" spacing  
 custom logo (.jpg or .bmp file required)  
ALL etching will be on bottom of glass panel only.

**Power Components (1 LF of LED light output = 3W):**  
 QTY: \_\_\_\_\_ DC-ELT10-CON: 12V DC 10W max. transformer with 6 connector mounting block (Up to 3.3 LF of LED panel lighting)  
 QTY: \_\_\_\_\_ DC-ELT60-CON: 12V DC 60W max. transformer with 6 connector mounting block (Up to 20 LF of LED panel lighting)

**Panel Specs:**  inches  mm

**Adjustable Shelf/Panel Components: OPTION A**  
 QTY: \_\_\_\_\_ MAG-TR-1M: 1m (39 3/8") power bar track with 305mm (12") lead with end caps  
 QTY: \_\_\_\_\_ MAG-ADP: Magnet Adapter - Connects adjustable shelf to power bar track  
 QTY: \_\_\_\_\_ EXT-2M: 2m (79") extension b/w power bar track & transformer

Item	Qty	Width	*Depth/Height	Wire Exit (Shelf/ Panel) FB=Front/Bottom BT=Back/Top
1				
2				
3				
4				
5				
6				
7				

**Hardwire Shelf/ Panel Components: OPTION B**  
 QTY: \_\_\_\_\_ LED-PKT-2M: 2m (79") power lead for direct wiring of panel  
(extension required for ALL hardwire applications)  
 QTY: \_\_\_\_\_ EXT-2M: 2m(79") extension wire for LED-PKT-2M (optional)

\* subtract 1/2" from shelf depth in adjustable shelf applications for power bar track  
 \* subtract 1/4" from shelf depth in fixed shelf applications

**On-Off Switch Components: OPTIONAL**  
 QTY: \_\_\_\_\_ RDSW-2M-WH: white round rocker switch w/ 2m(79") lead  
 QTY: \_\_\_\_\_ RDSW-2M-BL: black round rocker switch w/ 2m (79") lead  
 QTY: \_\_\_\_\_ TS2-72: two step on-off touch sensor w/ 1.8m (72") lead  
(controls up to 3 transformers)

Notes: \_\_\_\_\_


**Ask us about our aluminum frame cabinet doors.**

# °eluma technical specifications

## Adjustable Applications: LED Shelves (OPTION A)


### Face Frame LED Shelf Cabinet Application

- 1) Power bar to be mounted on right side of the inside on the face frame
- 2) Panel exit wire on front right (LED light source) width rail of panel
- 3) Subtract 1/2" from standard shelf depth for power bar & magnet attachment

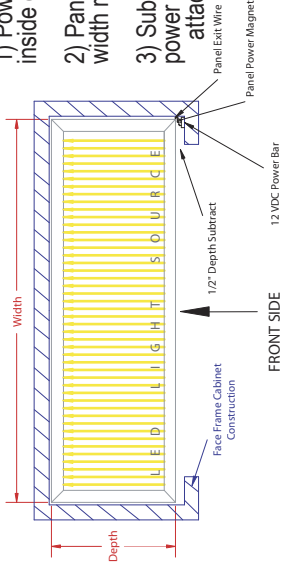

### Frameless LED Shelf Cabinet Application


- 1) Power bar to be mounted on right side of back wall of frameless cabinet
- 2) Panel exit wire on back right (opposite LED light source) width rail of panel
- 3) Subtract 1/2" from standard shelf depth for power bar & magnet attachment

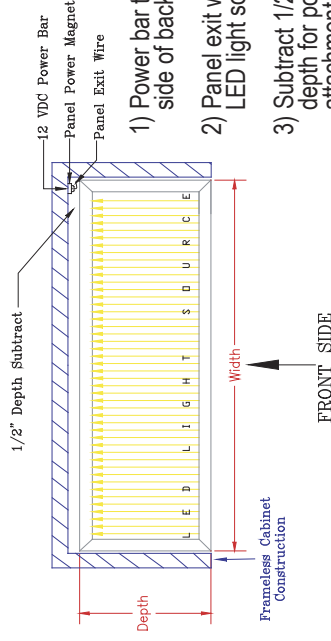

## Fixed/ Hardwired Applications: LED Panels or Shelves (OPTION B)


### Bottom or Front Side Exit Wire for LED Panel or Hardwired Shelf Application

- 1) Panel exit wire on bottom or front right (LED light source) width rail of panel
- 2) Wire will have connector for plug into transformer or into 2m (78 3/4") extension wire
- 3) Subtract 1/4" from standard shelf depth

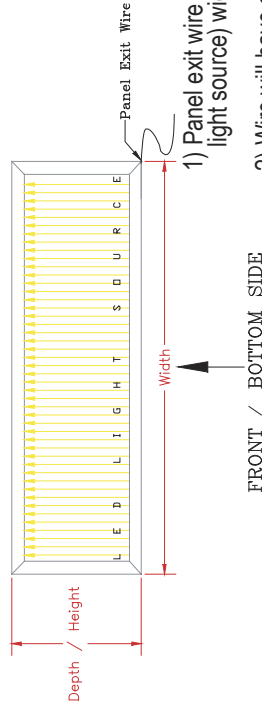


### Top or Back Side Exit Wire for LED Panel or Hardwired Shelf Application

- 1) Panel exit wire on top or back right (LED light source) width rail of panel
- 2) Wire will have connector for plug into transformer or into 2m (78 3/4") extension wire
- 3) Subtract 1/4" from standard shelf depth

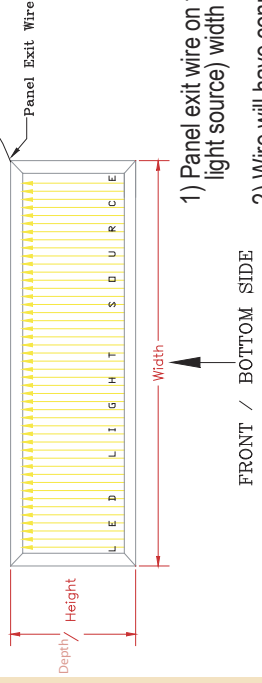


## Electrical Components

°eluma Panel




(REQUIRED)

Adjustable Shelf/  
Panel Components:  
(OPTION A)

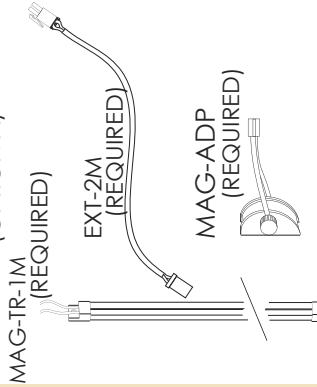


OR

Hardwire Shelf/  
Panel Components:  
(OPTION B)



On-Off Switch Components:  
(OPTIONAL - CHOOSE 1)



Power Components:  
(REQUIRED - CHOOSE 1)

